



Resilient floors

Tover laying systems

TOVER[®]
Your formula

Self-levelling compounds and primers



ROCKFLOOR F10

Fiber-reinforced self-levelling compound

Rockfloor F10 enables to level up to 10 mm thick irregular concrete sub-floors before the laying of resilient coverings.

- From 2 to 10 mm thickness with a unique application
- Quick hardening and drying
- Long time of self-levelling
- Suitable on under-heating
- Low content of chromate

kg/m²
1,5 x mm

OPEN TIME
> 30'

3-8 h

Self-levelling compounds and primers



PRIMER C4

Water-based adhesion promoter for self-levelling compounds

Ready to use mono-component primer to promote the anchorage of levelling compounds on any type of sub-floor, including non absorbent ones. It can be used also to promote adhesion between several applications of levelling compounds



- It improves the anchorage of self-levelling compounds
- On any type of sub-floors
- Recommended on under-heating



PRIMER PU100

Mono-component polyurethane primer
Solvent free and quick drying time

Low viscosity polyurethane resin primer, solvent free and odorless. It can be used as water-proofing (DPM up to 5% R.H.) and consolidating agent or to obtain synthetic mortars if mixed with sand. Suitable also on under-heating.



- Suitable on any absorbent sub-floor
- Solvent free
- Quick drying



ADEBLOK T19

Epoxy two-component primer
Solvent free

Solvent free two-component primer, odorless. It can be used as water-proofing (DPM up to 5% R.H.) and consolidating agent on any absorbent and non absorbent sub-floor including ceramics tiles. If mixed with sand, it enables to make thick repairs on the sub-floor.



- Suitable on any sub-floor
- Suitable also on under-heating
- Solvent free



Self-levelling compounds and primers



PRIMER TS

Water-based mono-component consolidating primer

Mono-component water-based primer for surface and deep consolidating of dusty, poor or damaged concrete sub-floors. Once dry, it enables bonding with any type of adhesives.



- Water-based
- Suitable on any absorbent sub-floor
- Suitable with any adhesive



NANO-FIX

Water-based surface antidust primer

Fast drying mono-component primer in water dispersion formulated with resins composed of nanometric particles. Anti-dust, it improves and homogenizes the surface absorption of substrates like concrete, gypsum, anhydride. It is suitable on under-heating systems. It enables bonding with any type of adhesive.



- Fast drying
- Odorless
- Suitable with any type of adhesive
- Conform to Eco-building requirements



Self-levelling compounds and primers



IDROBLOK C3

Three component solvent-free epoxy primer
For non-absorbent sub-floors

Epoxy solvent free three-component primer, it perfectly bonds even on very smooth surfaces like ceramics, sandstone, marble etc. Thus it can be used to water-proof non absorbent sub-floors promoting the glue adhesion. Recommended in case of humidity rising.

- Water-proofing action (max. 5% Res. H.)
- Also on non-absorbent sub-floors
- Odorless
- It promotes the adhesive anchorage




LVT LEVELLER

Ready-to-use grout smoother for LVT

Ready-to-use grout smoother to be applied before laying a bonded or floating LVT. Easy to sand, it allows levelling (up to 2 mm) without creating thickness and sanding is possible after just 2 hours.

- It allows levelling (up to 2 mm) without creating thickness
- Solvent free

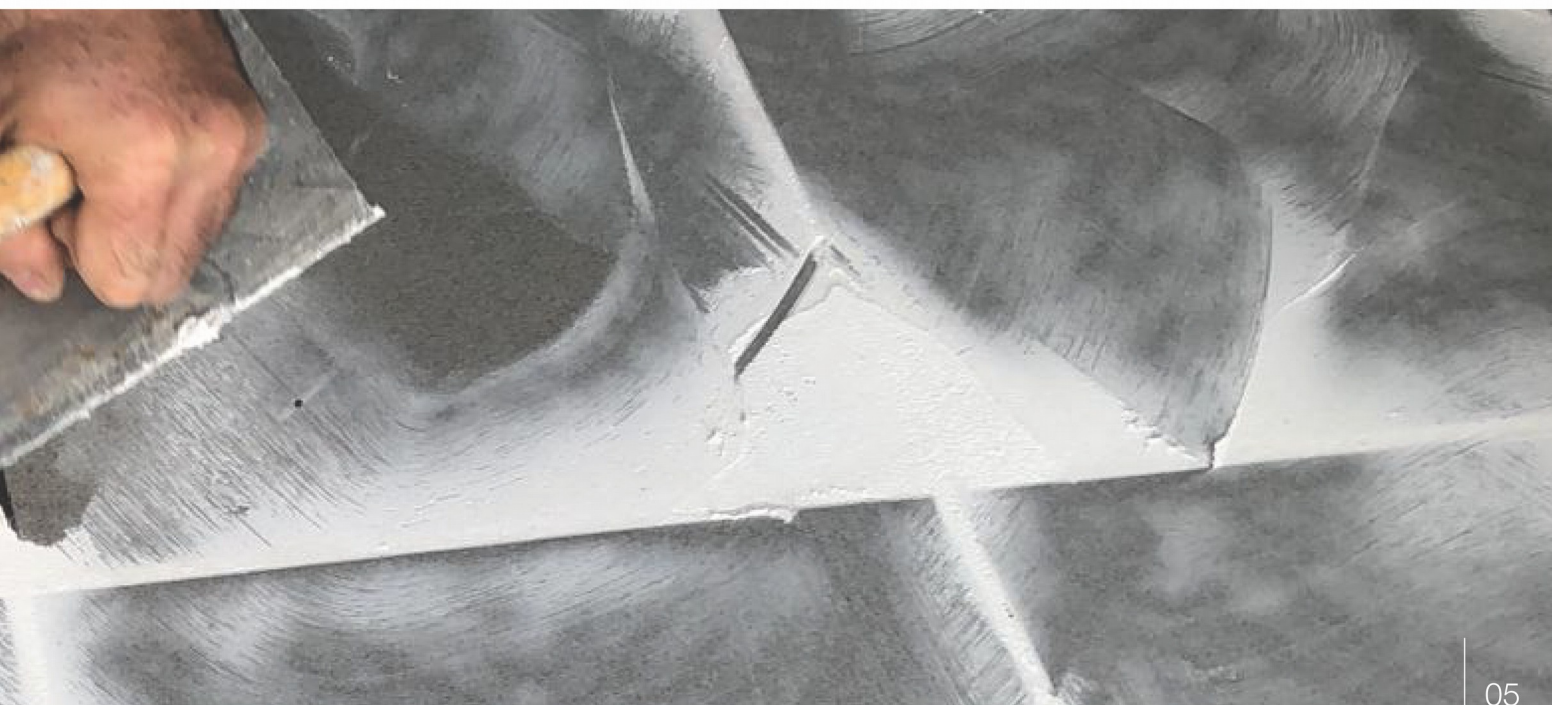



YOUR LAYING CANNOT WAIT.



TOVCOL LVT FIBRE⁺

LVT fibre-reinforced acrylic adhesive

No waiting time

Fibre-reinforced solvent-free acrylic adhesive, suitable for LVT flooring on any type of absorbent subfloors, with very quick and strong initial tack, an excellent adhesion and a perfect dimensional stability.

- No waiting time
- Suitable on absorbent subfloors including under heating
- Excellent adhesion

g/m²
200 - 400

WAITING TIME
0' - 10'

OPEN TIME
20' - 30'

3 - 5 h



TOVCOL MS LVT

Mono-component MS Polymer adhesive for LVT

Mono-component MS adhesive for LVT, SPC, PVC, rubber and linoleum. Suitable for laying on any kind of subfloor, also under heating ones, it is particularly resistant to dampness, water, heat, static and dynamic loads. It is perfect for commercial and industrial environment, it is secure for the user as isocyanate and solvent free.

- Resistant to humidity, water and heat
- Suitable also for synthetic grass indoor and outdoor
- Solvent free
- Isocyanate free

g/m²
350 - 400

OPEN TIME
40' - 50'

WAITING TIME
0'

12 h



TOVCOL MS LVT WALL

Mono-component MS Polymer adhesive for LVT on walls

Mono-component MS adhesive for LVT and SPC installation on walls, without leaking and without letting them slip. It is suitable on both absorbent and non-absorbent surfaces and can be used to apply every kind of resilient and textile covering. Particularly resistant to humidity, water and heat, it is suitable for commercial and industrial environ-

- No leak, no slip
- Solvent free
- Isocyanate free



TOVCOL RP

Acrylic adhesive for any type of resilient coverings
Also in vertical position

Solvent-free acrylic glue for bonding in interior resilient coverings on absorbent surfaces. Universal, it is suitable for PVC and vinyl, rubber, cork and textiles.

- Excellent adhesion peel
- On absorbent surfaces
- Suitable on under heating
- Odourless



Adhesives



TOVCOL MPL

Acrylic adhesive for any type of resilient coverings

Solvent-free acrylic glue for bonding in interior resilient coverings on absorbent surfaces. Universal, it is suitable for PVC and vinyl, rubber, cork and textiles.

- Excellent adhesion peel
- On absorbent surfaces
- Suitable on under heating
- Also in vertical position
- Odourless



TOVCOL TST

Pressure sensitive acrylic adhesive for resilient coverings

Solvent-free acrylic glue for bonding in interior resilient coverings like textiles, PVC, linoleum on absorbent and non-absorbent surfaces also in vertical position. Thanks to its permanent tack, the flooring can be removed without any damage.

- Permanently tacky
- On absorbent and non absorbent surfaces
- Also in vertical position
- Suitable on underfloor heating systems



TOVCOL TACKIFAST

Pressure sensitive acrylic adhesive for vinyl flooring, carpets and LVT

Solvent-free acrylic tackifier adhesive providing a permanently tacky film to lay and remove or replace carpets and LTV tiles. Thanks to its permanent tack, the flooring can be removed without any damage. Suitable for any tile backing on any sub-floor including under heating.

- Permanent tack
- Suitable on any subfloor including under-heating
- Also in vertical position





ISOCYANATE
FREE

TOVSTICK E66

Polychloroprenic adhesive
for PVC and plastic flooring

Polychloroprenic double buttering adhesive for bonding in interior PVC and plastic flooring on any type of sub-floors absorbent and non-absorbent. The glue has an immediate setting.

- Transparent
- Easy to apply
- For internal bonding only
- Suitable on under-heating

g/m²
300

WAITING TIME
15' - 20'

0"



ISOCYANATE
FREE



TOVCOL T91

Two-component epoxy-polyurethane
adhesive

Two-component fluid epoxy-polyurethane adhesive for bonding both in internal and external resilient flooring like PVC, rubber, linoleum, textiles on any type of sub-floors, absorbent and non-absorbent. Available in light brown, red, black and green. It can be applied in vertical position.

- Easy mixing
- Long pot life
- Excellent adhesion peel
- Suitable on under-heating

g/m²
400 - 800

POT LIFE
90'

12 h



TOVCOL PU2K

Two-component polyurethane adhesive for resilient flooring

Two-component polyurethane adhesive, water and solvent free, for indoor and outdoor installation of rubber or PVC flooring. Also suitable for LVT.

- Suitable indoor and outdoor
- Suitable also on non-absorbent subfloors
- Solvent free
- No allergy




TOVCOL PU2K GREEN

Two-component polyurethane adhesive for synthetic grass

Two-component solvent-free polyurethane adhesive for indoor and outdoor bonding of PVC and synthetic grass on any type of sub-floors absorbent and non.

- Excellent adhesion peel
- For indoor and outdoor
- Suitable on under-heating
- Available in green colour

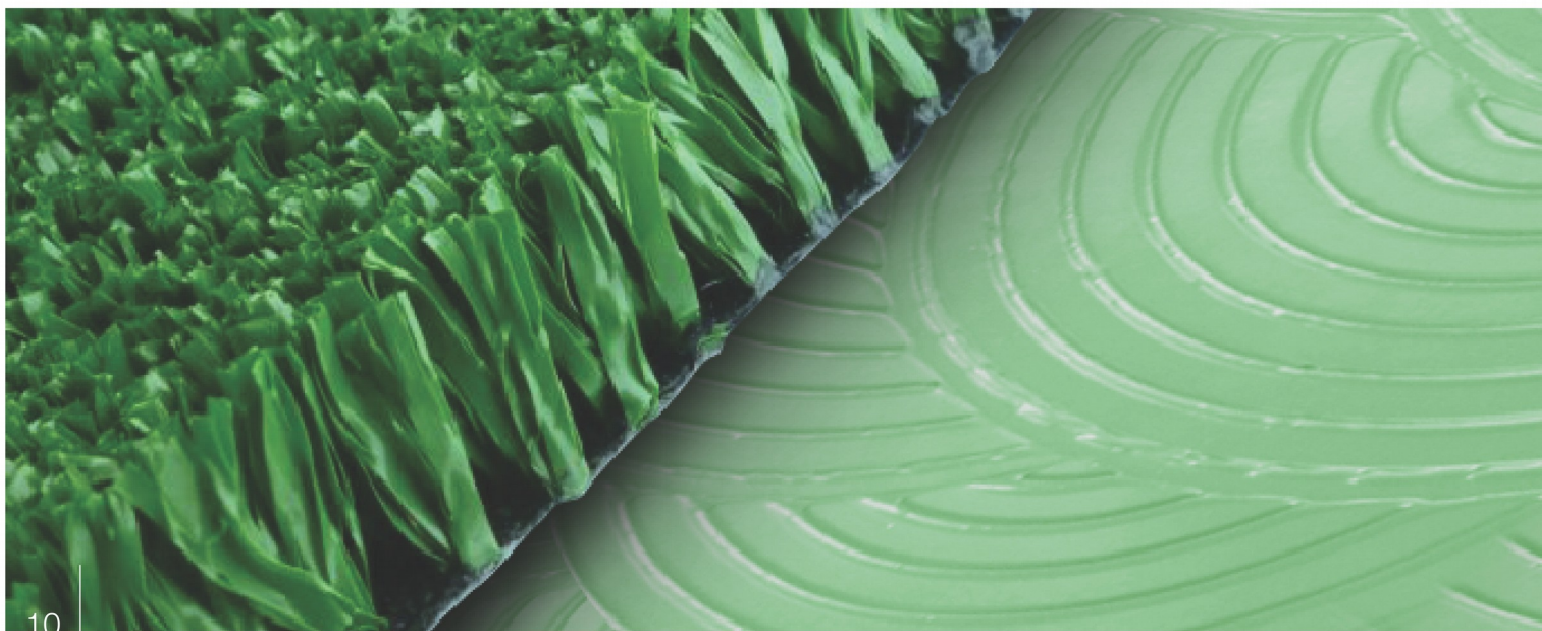



MYFLOOR CLEANER

Highly concentrated detergent
for flooring

Neutral highly concentrated detergent for the frequent cleaning of any surface. Thanks to its excellent degreasing properties, it enables to get very good results even on surfaces where the traffic is high and against greasy dirt.



NETTARDUE

Concentrated detergent
Wax remover

Concentrated detergent with high degreasing properties. Suitable to remove previous layers of metalized or emulsion wax from vinyl flooring, PVC, rubber, linoleum and wooden floors. Once diluted, it has excellent cleaning features.



MAKE-UP

Regenerating product for laminate, LVT, vinyl
and resins floors

Make-Up is a renewing product renovating laminate, vinyl and resins floorings which can be scratched or worn. When applied on a new laminate, it enhances the colour and the design tones. It forms a protective water-proof film on the floor, with excellent high-traffic properties. It protects the surface improving the cleaning results. Available in Matt and Glossy versions.



BEFORE | AFTER
MAKE-UP

TOVER[®]
Your formula


Made in Italy

find more on:

