

# TOVCOL MS TOVCOL MS START

Mono-component MS polymer adhesives

Tovcol MS and Tovcol MS Start are two of the major products by Tover in the field of **eco-compatibility** and **bio-construction**. Solvent and isocyanate free, their formulation contains secure plasticizers.

They guarantee **the best performance in laying** both engineered and solid wood up to a width of 200 mm. Suitable also on heating subfloors, they do not need any adhesion promoter even when applied on non-absorbent subfloors. Furthermore, these adhesives are very easy to clean.


# **TOVCOL MS**

Suitable for engineered wood and solid wood up to 200 mm width.

#### **TOVCOL MS START**

Suitable for engineered wood and solid wood up to 140 mm width.



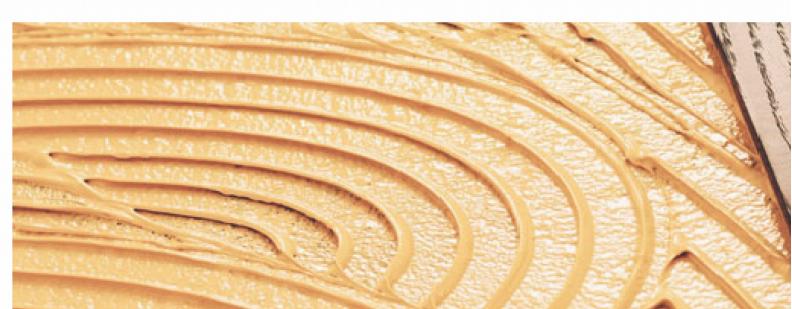

# HIGH PERFORMANCE SECURE RESULTS

# **FEATURES**



# STRONG AND ELASTIC

- Maximum performance on under-heating
- Suitable for all sizes of engineered floors
- Excellent properties of noise abatement



# **LONG-LASTING QUALITY**

- Long shelf-life: 12 months
- No degradation after laying
- No complaint for wood torn off
- No migration into the wood no dark spots



# **SECURE**

- Formulated only with resins made by KANEKA
- Secure plasticizers
- Declared as non hazardous by REACH\*
- Hypoallergenic and solvent free
- Isocyanate free

\*European Agency for Chemicals Safety





find out more on

